


DI-ROLL 1600

PROFESSIONAL EQUIPMENT FOR UNWINDING FILM ROLLS

A mechanical manual device with an electronic length counter for unwinding rolls of films **up to 1600 mm wide ***
Discreteness of counter is 1 cm.

- Exterior and construction of device including the length of the shafts can be changed according to your needs.

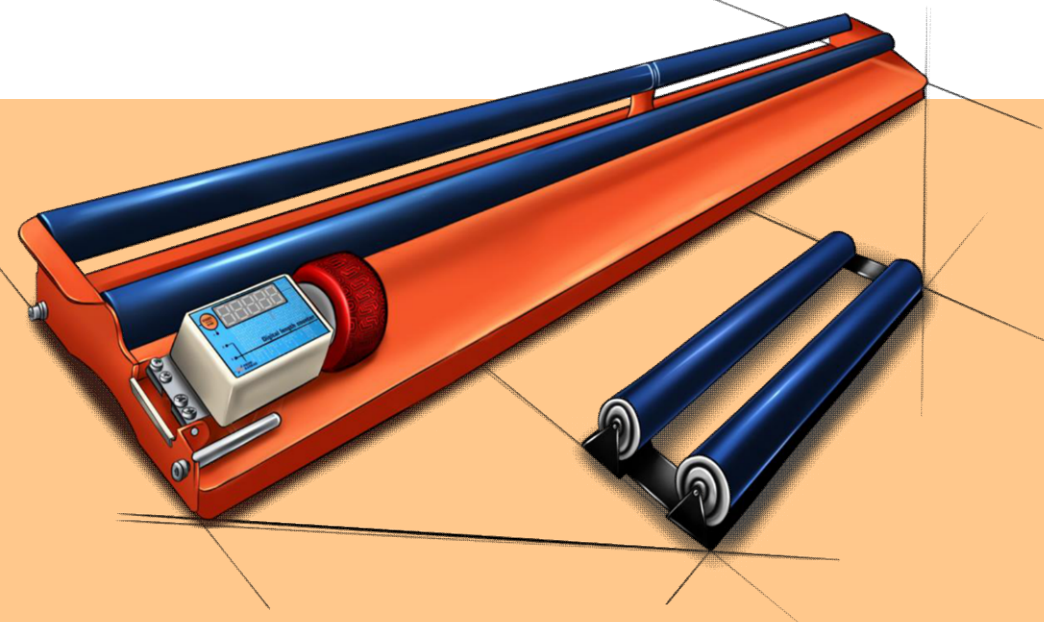

WHO BENEFITS FROM USING DI-ROLL 1600?



Wholesale and retail centers selling films for outdoor advertising, tinting, architecture, printing, paint protection.



Organizations engaged in equipping balconies with **reflective films** that protect against ultraviolet light.


Printing, advertising and production companies working with films in those volumes **when accounting and speed** of preparation of the required lengths of film blanks is important.



Companies that provide **services of tinting**, anti-gravel coating, interior decoration of cars, **coating glass** of buildings.

VIDEO EXAMPLES

OF USING THE EQUIPMENT

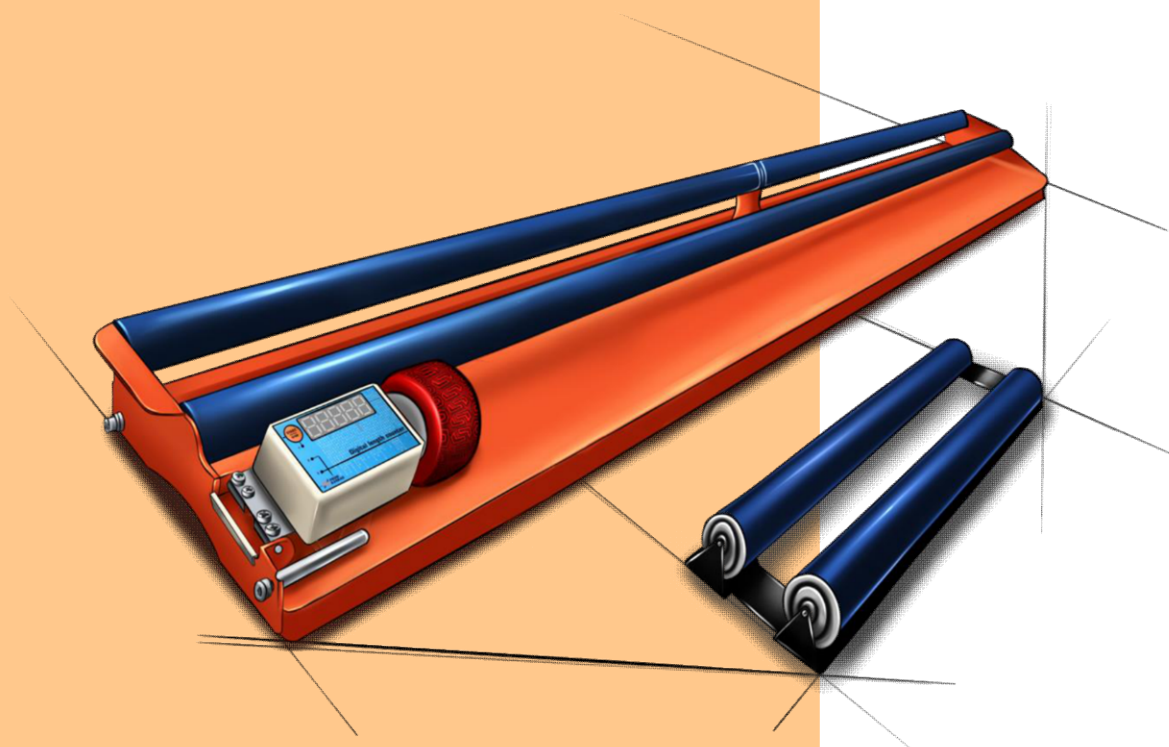

Di-roll 1600 short footage



<https://youtu.be/6LqmGfhwarQ>

Revision. Rewinding a roll of 50 meters



<https://youtu.be/xsgYbZfSITs>

Working process with Classic-Roll



<https://youtu.be/oAL77abVBFQ>

WHAT ARE THE **BENEFITS** OF USING DI-ROLL 1600?



IMPROVE ACCOUNTING ACCURACY;



PART OF YOUR BRAND IDENTITY*



INCREASING PRODUCTIVITY AND EFFICIENCY OF LABOUR;



MINIMIZING DEFECTS DURING USAGE OF DELICATE FILMS;



MINIMIZING OVERHEAD IN PRODUCTION, USAGE, AND SALES;



REDUCTION OF SPACE NEEDED FOR WORKING WITH ROLLS;




* Can be branded in accordance with the brand identity of your business.


ADVANTAGES OF DI – ROLL 1600



Soft rubber and grippy tread.
Does **not damage or slip**.



The discreteness of the counter is **1 cm**.
Measuring length is **999 meters**.
Accuracy and reliability of the counter.




Rigid guide for the knife along the entire
width of the roll. **Reliable cutting line.** Always.




Protective visor and **soft** frame supports.
Table protection. Stability.



Various **options on request**.
More efficient work.



Polymer-coated shafts and stiffener.
Everything for heavy rolls.



Industrial bearings and duralumin shafts.
Does not creak, does not bend.



Bright dial, optimal segment size.
Convenience in work.

TECHNICAL INFORMATION ON DI-ROLL 1600



FRAME:

Dimensions: 1650 x 235 x 100 mm


Weight: 13,5 kg

Coating: polymer epoxy

Frame: steel

Counter power supply: 5V x 1A

Grounding: strictly required!

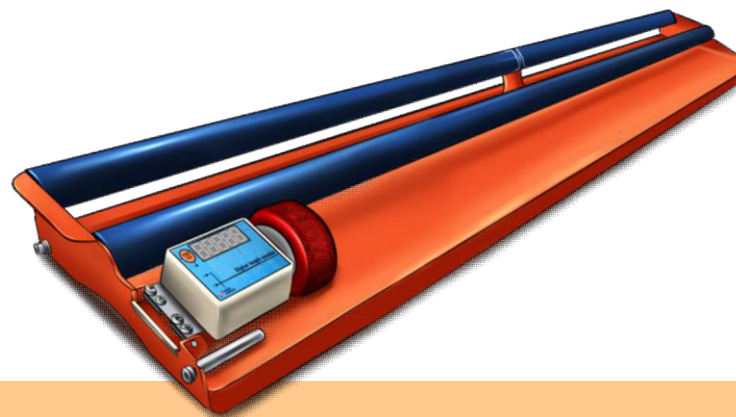

TECHNICAL INFORMATION ABOUT DIMENSIONS OF ROLLS AND TYPES OF FILMS

ROLLS:

Outer diameter: from 60 mm to 210 mm.

Length: up to 1500 mm (standard)

Weight: up to 30 kg

FILM:

Orientation of the front layer: any

Thickness: from 0,05 mm to 1,0 mm

Surface: not oiled





MINI-ROLL 500



OPTIONS THAT MAKE THE WORK EFFICIENT :

Mini-roll is a recommended device to aid in rewinding work. The product is popular also when working with long rolls with parallel installation of mini-rolls.

- Magnetic clamping bar, which allows to press the film before cutting;
- Calibration measure for checking and adjusting the accuracy of the device;
- «Catherine» ruler for cutting films and sheets.

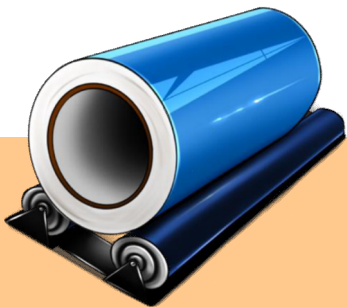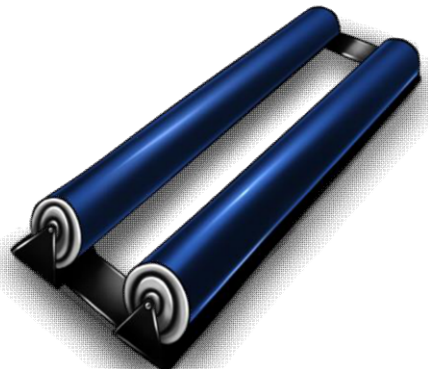

WE WILL BE GRATEFUL FOR YOUR SUGGESTIONS ON ADDITIONAL OPTIONS

gendir@promkaskad.ru

PRICES, DISCOUNTS, TERMS OF WORK

CURRENT RETAIL PRICES

LISTED ON THE WEBSITE:

GO TO WEBSITE



<https://roll-tools.com>

The wholesale terms are
Discussed individually!

Please, write to our e-mail address:

vazhenin.k@promkaskad.ru



YOU CAN CHECK THE FULL LIST OF OUR DIRECTIONS AND
PRODUCTS ON THE WEBSITE :

ABOUT COMPANY



<https://promkaskad.ru>

Send your **suggestions** on improvements,
comments on the operation of equipment, ideas for
creating new serial tools that are useful for your
industry to the **Head of PROMKASKAD, LLC.**

gendir@promkaskad.ru